



1116 Vaughn Parkway
Portland, TN 37148
Telephone (800) 662-0208
www.gastite.com
www.pythonls.com


Python Approved Lubricants

May 9, 2025

Sealing Surface Lubrication:

Nylog Blue sealant or compatible refrigerant oil is approved for sealing the connection points between all python-copper tubing fitting connections, as indicated in the diagram below. Apply a minimal amount of Nylog Blue only at these specific junctions to aid in sealing and to maintain system integrity.

Do not apply Nylog Blue or any lubricant type sealant to the threaded surfaces used to tighten or secure the fitting components. Application of lubricant to these threads can impede proper torque application, compromise mechanical connections, and may lead to loose components and failures over time.

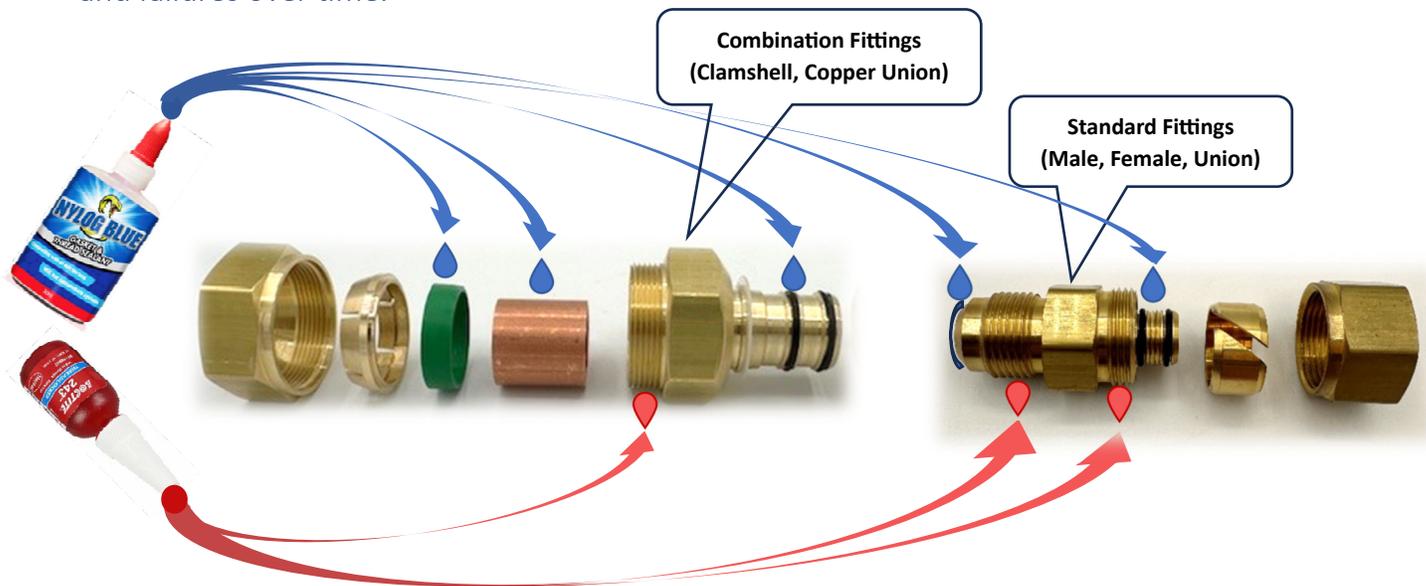

Thread Lock Application:

Thread lock medium-high strength fluid is approved for use on all python-copper tubing fitting threaded connections only. Apply a single drop of thread lock to the male side threads just prior to final assembly. The drop should be placed near the beginning of the threads for even distribution during tightening. Do not overapply and avoid contaminating sealing surfaces or internal fluid paths.

Please follow all recommended installation practices and torque specifications for flared connections to ensure a safe and effective connection.

